

**MOVIMENTA MG**   
[www.movimentamg.com.br](http://www.movimentamg.com.br)

PABX: (31) 3495-1486

VENDAS • LOCAÇÕES • ASSIST. TÉCNICA

# R 06

## Technical Data.

Electric Tow Tractor  
R06-06.






 **STILL**  
Making the right moves.

# R06 Electric Tow Tractor.


In accordance with VDI guidelines 2198, this specification applies to the standard model only. Alternative tyres, mast types, ancillary equipment, etc. could result in different values.

Characteristics	1.1	Manufacturer		STILL		
	1.2	Manufacturer's model designation		R 06-06		
	1.3	Power supply - electric, diesel, petrol, gas, mains electric		electric		
	1.4	Type of control - hand, pedestrian, stand-on, rider seated		rider seated		
	1.5	Carrying capacity/load	Q (kg)	150		
	1.7	Towing capacity	F (N)	1200		
	1.9	Wheelbase	y (mm)	1040		
Weight	2.1	Weight	kg	1020	1070	
	2.2	Axle loadings laden front	kg	-		
	2.2.1	Axle loadings laden rear	kg	-		
	2.3	Axle loadings unladen front	kg	42C	470	
	2.3.1	Axle loadings unladen rear	kg	60C	600	
Wheels, tyres	3.1	Tyres - rubber (V), superelastic (SE), pneumatic (L), polyurethane (PE)		SE / L		
	3.2	Tyre size - front		4.00-8 / 6 PR		
	3.3	Tyre size - rear		4.00-8 / 6 PR		
	3.5	Wheels - number front (x = drive wheel)		1		
	3.5.1	Wheels - number rear (x = drive wheel)		2x		
	3.6	Track width - front	$b_{10}$ (mm)	0		
	3.7	Track width - rear	$b_{11}$ (mm)	860		
Dimensions	4.7	Height to top of overhead guard (cabin)	$h_6$ (mm)	1960		
	4.8	Seat height	$h_7$ (mm)	890		
	4.12	Coupling height	$h_{10}$ (mm)	290 / 345 / 400		
	4.13	Platform height unladen	$h_{11}$ (mm)	610		
	4.16	Platform length	$l_3$ (mm)	440		
	4.17	Rear overhang	$l_5$ (mm)	345		
	4.18	Platform width	$b_9$ (mm)	830		
	4.19	Overall length	$l_1$ (mm)	1730		
	4.21	Overall width	$b_1$ (mm)	996		
	4.32	Ground clearance at centre of wheelbase	$m_2$ (mm)	115		
	4.35	Outer turning radius	$W_8$ (mm)	1650		
4.36	Inner turning radius	$b_{13}$ (mm)	105			
Performance	5.1	Speed laden	km/h	7		
	5.1.1	Speed unladen	km/h	17		
	5.5	Rated drawbar pull laden	N	-		
	5.5.1	Rated drawbar pull unladen	N	1200		
	5.6	Max. drawbar pull laden	N	-		
	5.6.1	Max. drawbar pull unladen	N	4500		
	5.7	Gradeability laden	%	As per diagram overleaf		
	5.7.1	Gradeability unladen	%			
	5.8	Max. gradeability laden	%			
	5.8.1	Max. gradeability unladen	%			
5.10	Brakes		hydraulic/electric.			
Motor	6.1	Drive motor hourly capacity	kW	3.2		
	6.3	Battery equipment to DIN 43531/35/36 A, B, C, no		43535 A	43531 A	
	6.4	Battery voltage	U (V)	24	48	
	6.4.1	Battery capacity	K 5 (Ah)	550 L (500-625)	330 L (300-375)	
	6.5	Battery weight	kg	445	560	
	6.6	Energy consumption according to VDI-Cycles	kWh/h	-		
Other	8.1	Drive control		microprocessor		
	8.4	Average noise peak at operator's ears	dB (A)	-		
	8.5	Trailer coupling, type/DIN		pin		

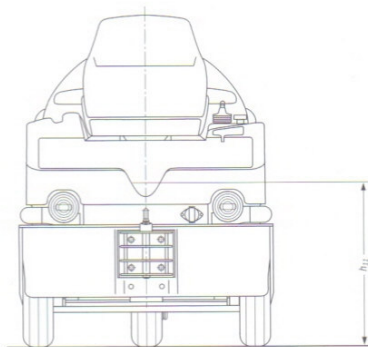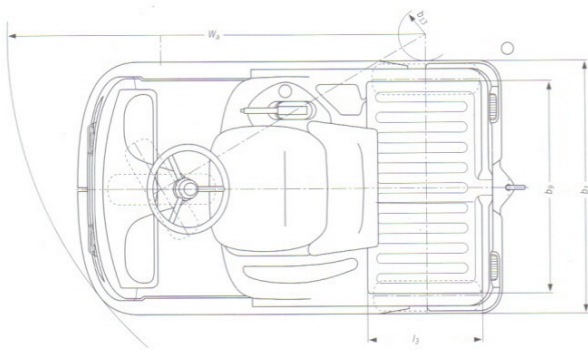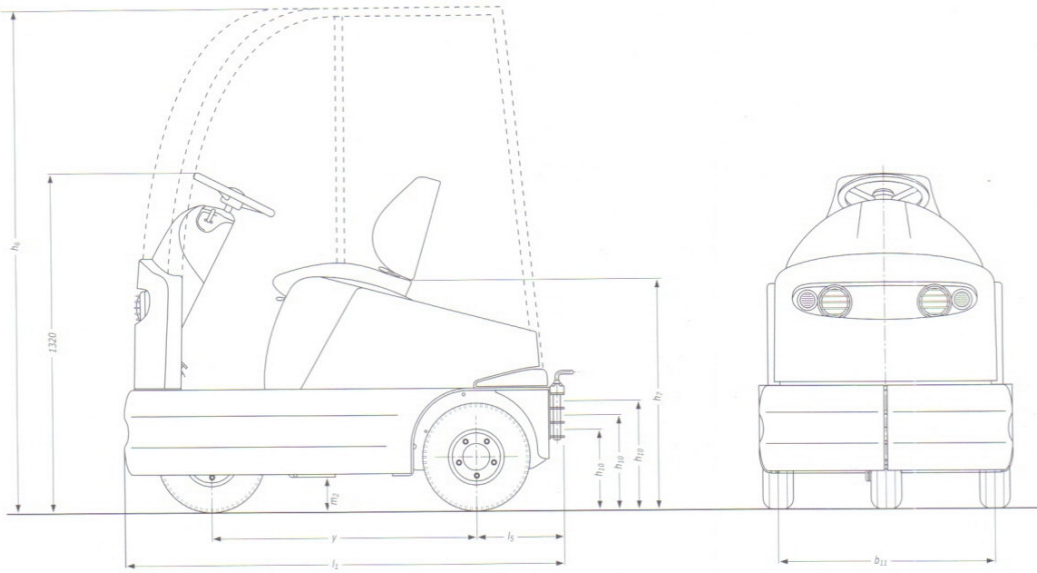

Front and rear view shown without cab.

### Performance chart

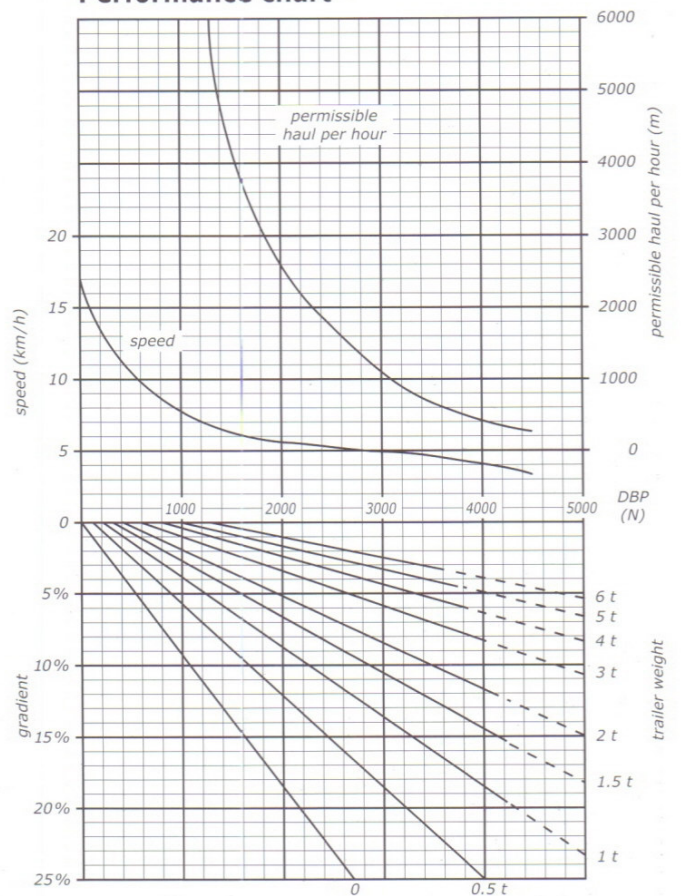

Load/gradient combinations shown by full line can be restarted from stationary on the gradient.

The permissible haul per hour is the total distance travelled, including the return journey and any downhill gradients.

It is recommended that braked trailers be used for trailer loads exceeding 2.5 tonnes and for all trailer loads if gradients are involved.

# Technical Data

## Electric Tow Tractor

### R06-06.


#### ■ Drive.

- The R06-06 features 24 volt drive as standard with 48 volt as an option.
- An easily serviced rear wheel drive unit with shunt wound DC motor gives sensitive driving response, smooth and powerful acceleration to top speed. Wear-free braking is achieved using only the drive pedal.
- The drive motor is actuated through a silent power adjuster using MOSFET technology (Metal Oxide Semiconductor Field Effect Transistor). This does away with the need for wear-prone direction and braking contactors.
- When the drive pedal is released, electrical energy is fed back into the battery (service braking) giving the R06-06 a greater range on one battery charge.

#### ■ Battery charging and changing.

The battery cover can be hinged back in two stages:

- half open to allow access to the battery
- fully open for a quick battery change or for servicing

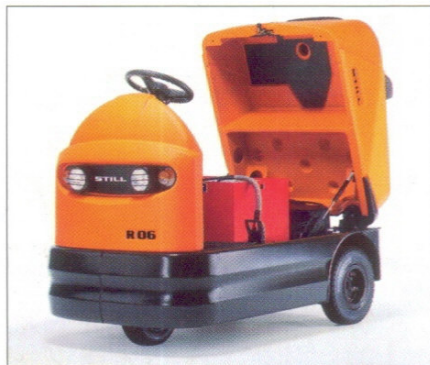

#### ■ Electrical system.

The tractor is equipped with a digital MOSFET controller to keep servicing costs low. Contactors are a thing of the past. Travel speed is controlled by the drive pedal, which gives soft starting and braking and makes for safe, efficient operation. The facility to pre-set acceleration and braking response as well as maximum speed increases operational safety, reduces down times and extends truck life.

#### ■ Brakes.

The R06 is equipped with three independent braking systems:

1. Electrical braking with recovery of energy when:
    - the drive pedal is released during travel;
    - the direction control is moved into the opposite direction.
  2. Hydraulic drum brakes on all wheels.
  3. Mechanical hand brake on the rear wheels. Electrical braking minimises brake lining wear.
- On downward gradients, travel speed is automatically reduced when the drive pedal is released - an additional safety factor.

#### ■ Steering.

Extremely light steering makes the tractor particularly manoeuvrable and reduces driver fatigue.

#### ■ Frame.

Completely self supporting body contributes to very stable driving characteristics. The frame is constructed for maximum strength and rigidity. The upper section is made of rugged polyethylene mouldings which resist corrosion, impact and abrasion.

The lower section of the frame is made of steel and consists of two external main beams. The bumper-like profile of these beams makes the tractor very sturdy. The battery is mounted low between the axles to give the greatest possible stability. Low centre of gravity ensures safe road holding.

#### ■ Lighting.

Standard equipment includes front headlights protected by grilles, sidelights, rear and brake lights. A 7 pin socket is fitted for electrical connection to the trailer.

#### ■ Tow coupling and load platform.

- The tractor is fitted as standard with a multi-stage coupling at the rear.
- A load platform is let into the rear section of the battery cover. Its surface is slightly tilted towards the rear and provided with a drain hole so that rain water or other liquids cannot collect. This load platform can take up to 150 kg (50 kg when a cab is fitted).

#### ■ Driver's Compartment.

The R06-06 provides a comfortable, ergonomically designed workplace and offers the following features:



- low entry step
- automotive style hand brake mounted to the right of the driver's seat
- roomy foot well fitted with non-slip rubber matting
- bottle holder and spacious storage compartment
- Driver's seat fitted with a pocket to hold documentation
- Display panel with:
  - combined warning light for hand brake/low brake fluid
  - warning light for operating fault
  - brush wear indicator
  - motor temperature warning
  - battery discharge indicator
  - work hour meter

#### ■ Standard equipment.

The tractor is fitted as standard with the following equipment:

- All safety devices
- Electrical system including 24 volt lighting
- Adjustable driver's seat
- Pneumatic tyres
- Micro-processor control
- Display panel
- Multi-stage coupling
- Two tone paint
- Front lights, sidelights, rear and brake lights.

#### ■ Optional equipment.

- Speed limiter
- Fixed cab with two removable glazed side doors and hinged window at the rear. Screen wipers front and rear. Front screen washer and demister unit. Interior lighting. Interior mirror and two exterior mirrors
- Canvas cab with roll up sides. Glazed screens front and rear. Screen wipers front and rear. Front screen washer. Interior lighting. Interior mirror and two exterior mirrors
- Weather protection with wiper and washer at the front
- Super-elastic tyres - normal or self coloured
- Cloth covered driver's seat - with or without seat heater
- Front towing coupling
- Automatic coupling front and rear
- Roadgoing lights
- Reverse inching button
- Audible reversing signal
- Special paint
- Other auxiliary equipment on request

#### ■ Safety.

The R06-06 complies with all valid EU safety requirements and regulations and carries the "CE" symbol.

The tractor is equipped with the following safety equipment:

- Three independent brake systems
- Emergency off switch
- Safety switch in the driver's seat

#### ■ Quality.

STILL tractors comply with the ISO 9001 quality standard. They are carefully designed and manufactured. Materials used are tested to stringent standards.

#### ■ Service.

Powerful diagnostics package within the controller allows faults to be traced quickly, reducing down times and servicing costs.

Important driving parameters can be adjusted using the digital controller, e.g. acceleration and braking characteristics, pre-selection of maximum speed etc.